



Curved Tempered Glass





Combines the beauty of curved glass with the strength to withstand thermal stress and wind loads, and the added value ability to drill and cut holes in the glass for increased design capabilities.

Manufacturing Capabilities

- All glass colors
- 1/4" to 3/4"
- Spandrel/Silk-Screened
- Digital Printing
- Low E
- Holes, Notches & Cut-outs
- Edge Finishes
- Laminated
- IGU

Size Limitations

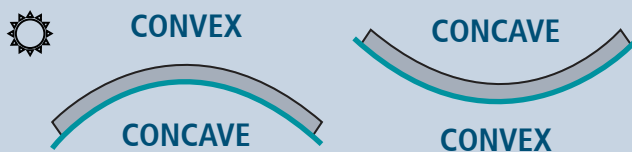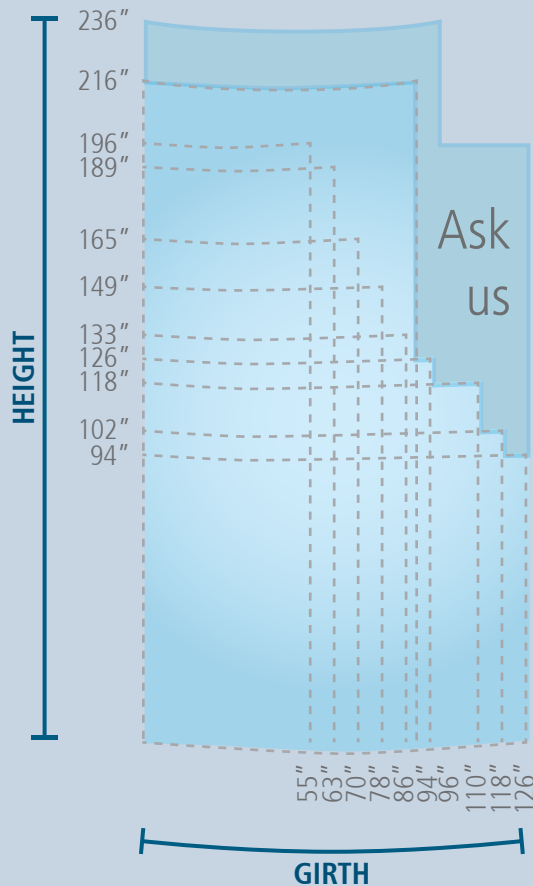

■ Coatings (Low E, Frit)

Laminated Glass Notes:

Glass Thickness:

Min: 1/4" + 1/4"

Max: Up to 1/2" (Depending on radius)


Interlayer Thickness:

From 0.030" to 0.090"


Interlayer Types:

- PVB Clear
130" (3.30m) x 338" (8.60m)
- PVB White Opaque
92" (2.35m) x 338" (8.60m)
- PVB Color/Translucent
96" (2.46m) x 338" (8.60m)
- XIR®
78" (2.00m) x 338" (8.60m)
- Trosifol® SC
126" (3.21m) x 338" (8.60m)
- Trosifol® ES
126" (3.21m) x 338" (8.60m)
- DG 41
126" (3.21m) x 338" (8.60m)
- SentryGlas® Clear
130" (3.30m) x 338" (8.60m)
- SentryGlas® Translucent White
72" (1.83m) x 338" (8.60m)

*Width Up to 130" available upon request

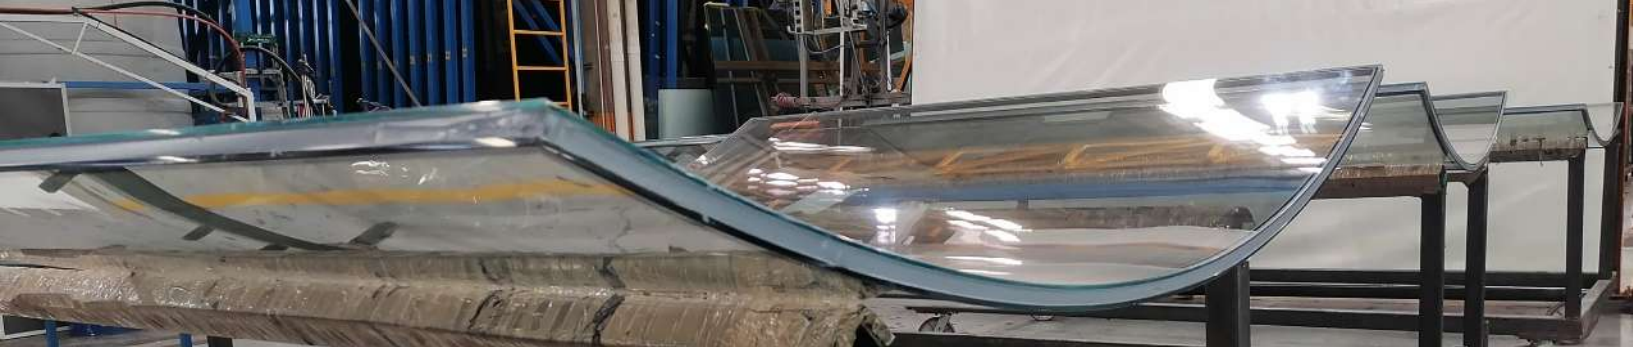

Other Dimensional Limitations

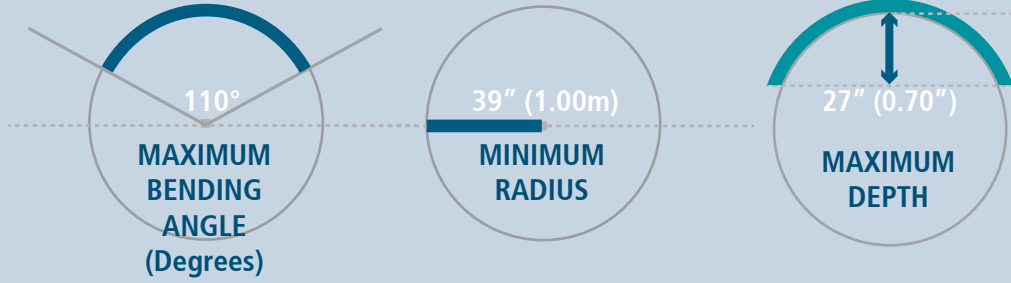

Please contact our Sales Team regarding any specific design criteria or quoting considerations you may have.

Contact: sales@criscurva.com
Toll Free: 866.827.6049



www.criscurva.com

click here

